

Gas-turbine diagnostics using artificial neural-networks for a high bypass ratio military turbofan engine

R.B. Joly, S.O.T. Ogaji*, R. Singh, S.D. Probert

School of Engineering, Cranfield University, Bedfordshire MK43 0AL, UK

Accepted 10 October 2003

Abstract

The Tristar aircraft, operated by the Royal Air Force, fly many thousands of hours per year in the transport and air-to-air refuelling roles. A large amount of engine data is recorded for each of the Rolls-Royce RB211-524B4 engines: it is used to aid the maintenance process. Data are also generated during test-bed engine ground-runs after repair and overhaul. In order to use recorded engine data more effectively, this paper assesses the feasibility of a pro-active engine diagnostic-tool using artificial neural networks (ANNs). Engine-health monitoring is described and the theory behind an ANN is described. An engine diagnostic structure is proposed using several ANNs. The top level distinguishes between single-component faults (SCFs) and double-component faults (DCFs). The middle-level class includes components, or component pairs, which are faulty. The bottom level estimates the values of the engine-independent parameters, for each engine component, based on a set of engine data using dependent parameters. The DCF results presented in this paper illustrate the potential for ANNs as diagnostic tools. However, there are also a number of features of ANN applications that are user-defined: ANN designs; the number of training epochs used; the training function employed; the method of performance assessment; and the degree of deterioration for each engine-component's performance parameter.

© 2003 Elsevier Ltd. All rights reserved.

1. Introduction

The art of engine-health monitoring (EHM) is becoming more complex as the array of technologies available increases. However, core-engine performance monitoring techniques continue to be the prime diagnosis tool, whereby the analysis of

* Corresponding author. Tel.: +44-1235-750-111; fax: +44-1235-751-232.

E-mail address: s.o.t.ogaji.2000@cranfield.ac.uk (S.O.T. Ogaji).

Nomenclature and Abbreviations

ANN	Artificial neural network
BPR	Bypass ratio
DCF	Double-component fault
EDMS	Exhaust-debris monitoring system
EFH	Engine's flying-hours
EGT	Exhaust-gas' temperature
EHM	Engine-health monitoring
EHUMS	Engine-health and usage management system
GA	Genetic algorithm
GPA	Gas-path analysis
HCF	High cycle-fatigue
HP	High pressure
HPC	High-pressure compressor
HPT	High-pressure turbine
ICM	Influence coefficient matrix
IDMS	Inlet-debris monitoring system
IP	Intermediate pressure
IPC	Intermediate-pressure compressor
IPT	Intermediate-pressure turbine
ISA	International standard-atmosphere
LP	Low pressure
LPC	Low-pressure compressor
LPT	Low-pressure turbine
MSE	Mean square error
N	Relative spool speed
OEM	Original equipment-manufacturer
OLS	Off-line sensor
OPR	Overall pressure-ratio
P	Pressure (bar)
ROI	Return on investment
SCF	Single-component fault
SCG	Scaled conjugate gradient
SFC	Specific fuel-consumption
SLS	Sea-level static
T	Temperature (K)
TET	Turbine's entry-temperature
$\dot{W}_f$	Rate of fuel flow (kg/s)
Γ	Flow capacity
η	Efficiency

Glossary

Axon	Long nerve-fibre that conducts impulses away from the cell body of the neuron
Dendrites	Extension of a nerve cell that conducts impulses from adjacent cells inward toward the cell body
Design Point	The optimal point determined by a number of engine parameters where an engine is intended to operate most of the time
Neuron	A specialised cell for conducting nerve impulses
Synapse	The junction across which a nerve impulse passes from an axon terminal to a neuron

the gas-turbine's gas-path parameters provides information about the degradation severity of each gas-path component [1]. In addition, other technologies such as wear-debris analysis and vibration monitoring also remain key techniques of EHM. As computing power continues to increase and more mathematical tools become available for the EHM of gas-turbines, the available artificial intelligence grows in complexity.

The cost of an aircraft's diversion in flight, for a technical reason, is potentially high. The resulting loss of passenger confidence leading to a longer-term reduced revenue, short-term costs associated with the diversion (e.g. hotels, transport) and operational inconvenience (e.g. the aircraft being unavailable at the required airport for the next planned trip, as well as the disruptions to crew rosters and aircrew duty times) can be very expensive. The consequences incurred in the ditching of a plane or a catastrophic failure are even higher. In addition, for military aircraft, the results of direct mission failure and adverse effects on other aircraft can be very grave.

In order to achieve excellent in-service use of modern gas-turbine aero-engines, they should incorporate capable performance-monitoring systems. However, the ability of each such diagnostic system is reliant upon complying with the following criteria:

- Well-defined reliability goals: for instance, Rolls-Royce have sought to improve despatch reliability of the Boeing 767 from 99.91 to 99.95% by incorporating EHM on the RB211-535E4 [2].
- Physical-space limitations for system hardware.
- A well-defined system specification: for example, definition of the end user as either maintenance personnel, aircrew or original equipment-manufacturer.
- Format of information output: cockpit indication, ground maintenance trending by operator or third-party telemetric monitoring.
- Cost.
- Data-processing procedure.
- Changes to the above criteria, depending on whether or not the EHM system is designed-in or retrofitted.

2. Engine-health monitoring

2.1. Overview

The specialist EHM discipline is a desirable aspect of modern aero-engine gas-turbine management: it provides engine-fleet managers with a tool for the pro-active management of assets.

The definition of the word *health* is ‘a state of being well and free from illness; a condition of the body’. This immediately sets EHM apart from the concept of *usage*, which is ‘the manner of using or treating something; customary practice’. Nevertheless, there is often a misunderstanding of the difference between an EHM system and an Engine Health and Usage Management System (EHUMS): EHM provides an assessment of the current state of an engine and EHUMS is both an assessment of the current state *and* the common use of the engine.

According to Green [3], a form of ‘sensing, learning and reasoning EHM system is the cornerstone or more importantly the missing link between our current diagnostic confused state, and the status of a true diagnostic with prognostic, or knowledge with wisdom capability’. The message was that ‘smart’ EHM was required and led to the evolution of EHM/diagnostics towards EHM/diagnostics/prognostics.

2.2. Traditional forms of EHM

These have been described extensively by Li [1], Alcock [4], Theriault [5], Escher [6], and Powrie and Fisher [7]. EHM itself has long been recognised as only a part of an engine-monitoring system (EMS); an EMS includes considerations of the associated people, equipment and procedures involved in gas-turbine engine monitoring [8].

The EHM process, must be able to assess the performance of the engine and also its mechanical integrity. Fig. 1 illustrates the type of damage that needs to be detected. The challenge is usually complicated by the requirement to conduct the EHM with the engine ‘on wing’, or installed. EHM can be divided into a number of technologies: wear-debris analysis, gas-path performance, visual inspection, vibration analysis and life usage. Table 1 summarises the technologies available and the types of health-assessment techniques utilised.

Most EHM processes combine the technologies available; for instance a gas-path performance assessment might be confirmed or supported by a vibration analysis. Gas-path performance monitoring techniques include both linear and non-linear gas-path analyses (GPAs).

2.3. Emerging forms of EHM

Two examples are shown in Table 2. The state of an engine can be inferred by monitoring the electrostatic charge of particles entering, travelling through or departing from an open-flow system. Electrostatic technology has the ability to classify fault severity in real-time with an early-warning capability.

Table 1
Summary of traditional EHM methods

EHM method	Assessment based on	Monitoring technique	Features
Wear debris analysis	Measurement of mechanical debris arising due to wear of components such as bearings and shafts	Visual via magnetic chip plug	Rapid assessment Trending
Gas-path performance	Monitoring of engine-dependent parameters such as pressures, temperatures and spool speeds—comparison with baseline values and inference of independent parameter changes	Sensor based	Trending Unless linked to diagnostic system, requires manual assessment of data
Visual inspection	Non-destructive external and internal visual inspection techniques (for gas-path components) using liquid penetrants, eddy currents, ultrasound, radiography and/or lasers	Human eye using rigid/flexible borescopes	Rapid assessment Engine may require partial strip Quality of assessment is highly dependent upon the experience of the technician
Vibration analysis	Monitoring of vibration characteristics and comparison of actual values with baseline figures	Sensor based	Rapid assessment Quality of assessment is highly dependent upon the experience of the technician
Life usage	Life monitoring of gas-turbine systems; life dependent upon creep and low cycle-fatigue	Sensor based	Prediction and prevention of early failure Life calculation based on mission profile; can be subjective

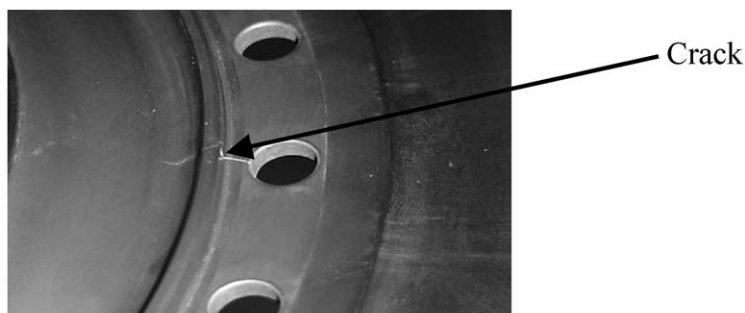


Fig. 1. Bolthole crack in the F-100 stage 10 disc.

Radar technology offers similar benefits to electrostatics, but has the added advantage that vibration monitoring could be applied simultaneously. As EHM costs require careful control, the use of multi-function of a single-sensor is an appealing attribute.

3. Artificial neural-networks

3.1. Background

A neural network is a system composed of many simple processing-elements, operating in parallel and whose function is determined by the network structure and connection strengths: the processing is performed at computing elements or nodes. Neural-network designs are inspired by the architectures of biological nervous systems, which use many simple processing elements, operating in parallel, to obtain high computation-rates. These mathematical neuron models are commonly referred to as artificial neural-networks (ANNs). Unlike the classical digital-processing techniques used by most computers, ANNs possess the ability to [9,10]:

- perform parallel processing of data;
- cope with noisy data;
- cope with system faults; and
- adapt to different circumstances.

Digital computers process data serially in real-time, but the downside is that they have to prioritise tasks. However, ANNs process data asynchronously in real-time, which means they can cope with multiple simultaneous inputs without detriment to the quality of the output.

The human nervous-system was partially understood by the Greeks in 200 BC. By the late 1800s, sensory processing was already being described as a switching network. In 1957, Rosenblatt conceived the 'perceptron' neural-network [11], i.e. a relatively simple network 'whose weights and biases could be trained to produce a correct target vector when presented with the corresponding input vector' [12]. The

Table 2
Summary of emerging EHM methods

EHM Method	Assessment based on:	Monitoring technique	Features
Electrostatics	Monitoring the electrostatic characteristics of debris in different parts of the engine: Inlet-Debris Monitoring System (IDMS) Exhaust-Debris Monitoring System (EDMS) Oil-Line Sensor (OLS)	Sensor based	Real-time: Early warning of faults Severity of fault predicted so benefiting the maintenance operation OLS can detect non-metallic debris
Radar	Monitoring of radar signature at pre-defined locations in the gas-turbine	Sensor based	Debris ingestion /damage severity information Potential for vibration monitoring Data processed into 'go/no-go' format

limitations of the perceptron model were highlighted in 1968 and the evolution of neural networks slowed until the 1980s. Understanding of neural networks improved rapidly thereafter [11].

ANNs can mean different things to different people. Mathematicians and physicists consider neural networks to be dynamic systems via which problems are solved through relaxation processes. In each such network, the energy state moves towards an energy minimum that corresponds to a solution. The Hopfield network is a classic example [11]. Biologists and psychologists, however, see ANNs as a means of implementing a variety of cognitive and sub-cognitive functions, as interpreted by Grossberg [11]. Finally, there is the understanding of ANNs by an engineer, who will identify the most appropriate optimal network design, and apply it to the task to be solved. The common theme throughout the different interpretations, however, is that ANNs are dynamic, i.e. possess the ability to change with time.

3.2. *The human brain*

ANNs are modelled on the structure and behaviour of neurons and synapses in the human brain. Therefore it is desirable to understand the operation of a human neuron prior to investigating the structure of an ANN. A neuron consists of a cell body with a number of dendrites and a single axon. The dendrites supply a means of inputting the signals from other neurons into the cell body and the axon provides a means of outputting the signal from the cell body to other neurons. The architecture is shown in Fig. 2.

A neuron does nothing unless the collective influence of all its inputs reaches a threshold level, above which the neuron produces a full-strength output in the form of a narrow pulse that proceeds from the cell body, down the axon, and enters the axon branches. The neuron is said to “fire” in such an event [13]. The dendrites can provide many inputs but the axons supply far fewer outputs. Between an axon and the dendrite of an adjacent neuron, there exists a synapse, i.e. a link consisting of a pre-synaptic membrane and a post-synaptic membrane. Between these membranes, there is a synaptic gap. As a signal leaves a neuron via the axon, a voltage is induced across the synaptic gap and acts as a neuro-transmitter providing an adjacent dendrite with a neuro-signal.

The stimulation at a synapse can either encourage or discourage the neuron to fire. The description so far has been for one or two neurons. Before discussing ANNs, one should realise that there are $\sim 10^{11}$ neurons in a human brain and a single neuron can receive inputs from as many as 10^5 synapses [13].

4. **Diagnostics for a high BPR turbofan**

4.1. *Data generation*

In the absence of real engine-data, it was necessary to use a gas-turbine performance model to generate the required data for application to a neural network. For

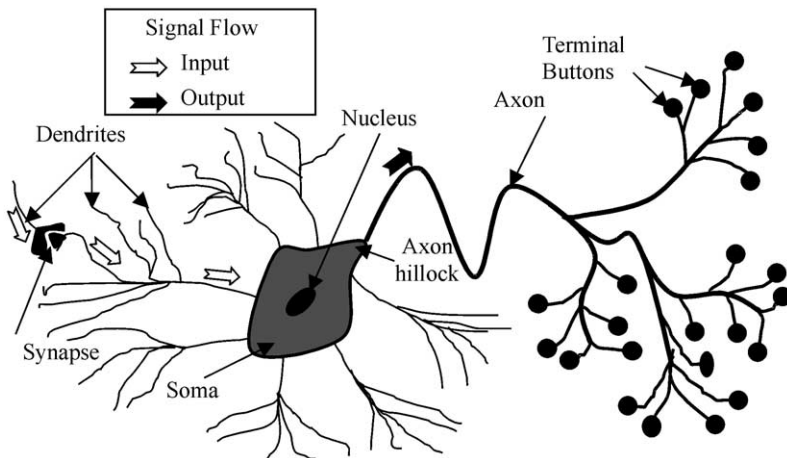


Fig. 2. The human neuron.

this purpose, a simulation program called “Turbomatch”, developed at Cranfield University, was used. However, the first step in setting up the diagnostic process was to decide on the design point at which the work was to be conducted. Given that the performance data were available for take-off under ISA SLS conditions, it was chosen as the design point. The second step was then to establish the performance parameters required to simulate the behaviour of the appropriate version of the engine: i.e.

- TET
- EGT
- Compressor’s pressure-ratio
- Thrust
- Mass flow-rate
- OPR

It was then intended to modify the Turbomatch simulation so as to achieve the desired take-off thrust along with the appropriate values of the TET, EGT, compressor pressure-ratios and OPR. However, it soon became apparent that, to achieve the desired result, modifying the model had to be an iterative process. Hence, many of the parameters ended up with significant percentage differences between the provided and actual values. Thrust and TET are arguably the most important to keep as close to reality as possible: thrust so as to maintain the specified value and TET at a level that does not exceed the cooling ability and ‘lifing’ criteria. The percentage difference values were an undesirable feature of the model, since the errors could be of the same magnitude as those of the faults that were ultimately being simulated.

In order to assess the health of a gas-turbine engine and ultimately provide a diagnosis concerning any detected faults, it is desirable to have data that relate

dependent (engine measurements) to independent (performance) parameters under a number of conditions.

The Turbomatch program has the ability to simulate the behaviour of an engine as well as the effects of implanted faults in its engine components, for instance a reduction in component efficiency or mass-flow capacity. Turbomatch was therefore used to generate data for the effects of various engine-component deteriorations.

The relationship between physical degradation and simulated degradation is realised by choosing certain ratios between component efficiency and mass-flow capacity degradations. The exact ratios chosen can be open to some individual subjectivity and so it was worthwhile establishing the values of their ratios commonly concluded from previous research [6,14]. The ratio of efficiency to mass-flow capacity chosen for component 1 in all the pairs and component 2 in the IPC + HPC pair was 1:3. This represented the effect of compressor fouling [6]. The ratio of efficiency to mass-flow capacity for component 2 in the IPC + HPT and IPC + IPT pairs was chosen to be 1:2, which is typical of the effect of erosion of the turbine [6] (see Table 3).

Some of the key factors that should be considered before attempting practical network training are included in Table 4: whilst there are other factors, many of the considerations will be common.

4.2. Strategy and plan

Previous studies demonstrate that ANNs, trained with simulated data representing engine degradation, can be used for diagnostic purposes [4]. Two respected sources for research have included a requirement to assess ANN performance when the engine suffers multiple-component faults [4,5]. Hence this study considered multiple-component faults, which occur commonly in gas-turbine aero engines. A plan was devised as shown in Fig. 3.

4.3. Practical implementation

In order to train an ANN, 3 sets are required:

- training data;
- target outputs;
- test data.

Table 3
Planned double-component independent parameter deviations

Component Pair	Component 1 deviations		Component 2 deviations	
	% η	% Γ	% η	% Γ
Components 1 + 2				
IPC + HPC	−5	−15	−3	−9
IPC + HPT	−5	−15	−5	+10
IPC + IPT	−5	−15	−2.5	+5

Table 4
Factors to consider prior to ANN use

Factor	Reason for consideration
Key objective: fault approximation or classification	Must not lose sight of the main goal of the study
Engine component to be investigated	Can realistic data be generated or obtained for the chosen engine component(s)?
Number of data points to be generated or obtained	Network training period is a function of the number of points to be processed
Type of ANN design to be used throughout the study	Credible comparison of results with previous conclusions
Recommendations from previous studies	Avoidance of (i) duplication and (ii) wasted effort
Backstop date for completion of practical investigation	Allow enough time for analysis and discussion of the derived data

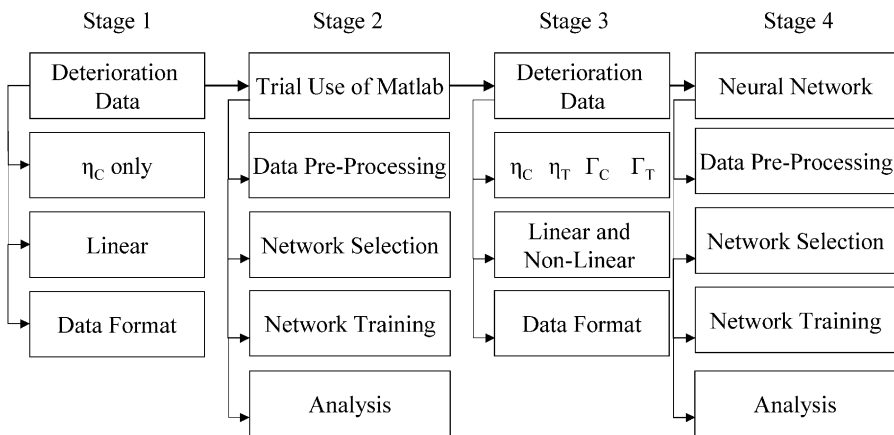


Fig. 3. The plan of the present research project.

An ANN requires only raw data. The ANN does not need to know the intended use of the output and this is therefore an attractive feature, since the potential uses are limitless. For the reasons mentioned, the data sets are presented in “numbers-only” format and do not require any data labels. The engine data were initially mixed with a signal that was meant to represent sensor noise. The actual noise was generated randomly for each set of 11 engine parameters; the magnitudes employed were the same as those used for a sensor suite studied by Ogaji, et al. [10] (see Table 5).

Once the noise was superimposed, the data were normalised. The diagnostic structure is shown in Fig. 4.

5. DCF results

Only DCF results are presented in this paper. Furthermore, only three pairs, out of a possible 15 fault combinations, are investigated.

The three ANNs, one for each DCF combination, were trained and tested: and Fig. 5 shows the arising performance summaries for the investigated fault-quantification networks. The last line in the figure’s title indicates the number of epochs considered, the number of neurons in the hidden and output layers of the defined network structure, the fault category and finally the type of training algorithm applied.

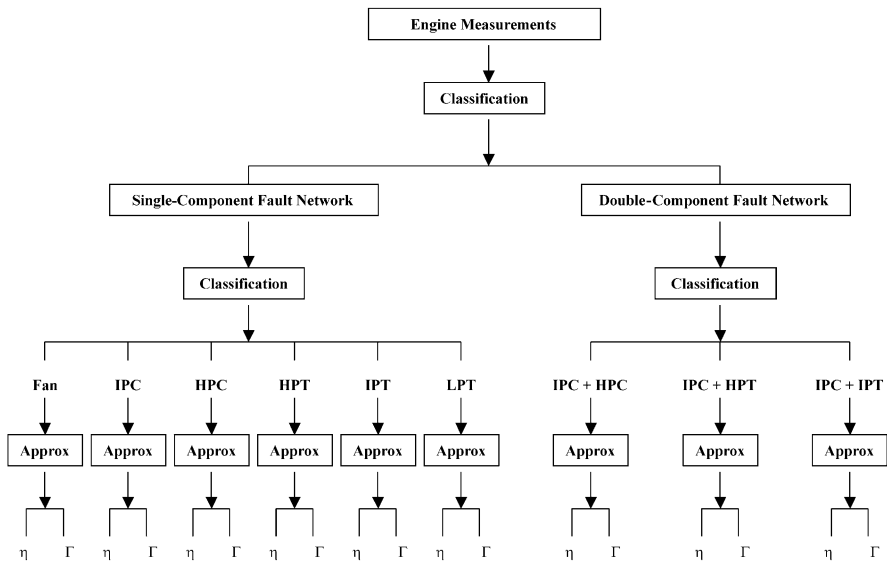


Fig. 4. The diagnostic structure.

Table 5
Sensor’s noise-levels

Engine parameter	Description	Noise ± (% of range)
N_1	LP relative spool-speed	0.03
N_2	IP relative spool-speed	0.03
N_3	HP relative spool-speed	0.02
P_3	Fan’s exit total-pressure (bar)	0.10
P_5	LPC’s exit total-pressure (bar)	0.10
T_3	Fan’s exit total-temperature (K)	0.40
T_5	LPC’s exit total-temperature(K)	0.40
T_{10}	LPT’s inlet-temperature(K)	0.40
T_{12}	IPT’s inlet-temperature (K)	0.40
T_{13}	HPT’s inlet-temperature (K)	0.40
W_f	Fuel flow (kg/s)	0.40

The first observation is that the standard deviation is relatively low, especially when compared with the magnitudes of the standard deviations for the single-component fault ANNs. However, the magnitude of the standard deviation for the double-component networks would be expected to be higher than for the single-component ones. Secondly, the IPC has a consistently poor comparative performance regardless of the pairing, although this is within the context of relatively low overall standard deviations.

Furthermore, the mean error for the IPC is relatively high. For instance, the lowest deviation for the IPC efficiency is 0.5% and therefore a mean error of 0.135 (see Fig. 6) means that the spread of actual values for a nominal 0.5% could be 0.365–0.635. If the standard deviation of 0.105 (see Fig. 5), is then taken into account, the spread of possible values for a nominal 0.5% degradation in IPC efficiency could be 0.26–0.74%. This degree of accuracy represents a 50% possible variation on the nominal value. The accuracies for each component vary depending on the particular pairing, but an inspection of the standard deviation and mean error plots shows only small variations in the values of the respective parameters. This basic assessment could be conducted for all the components: it illustrates 2 key findings:

- the accuracy established may be unacceptable if the gas-turbine under investigation has very small degradations in efficiency; and
- considering either the standard deviation or the mean error in isolation is inadequate for assessing network performance.

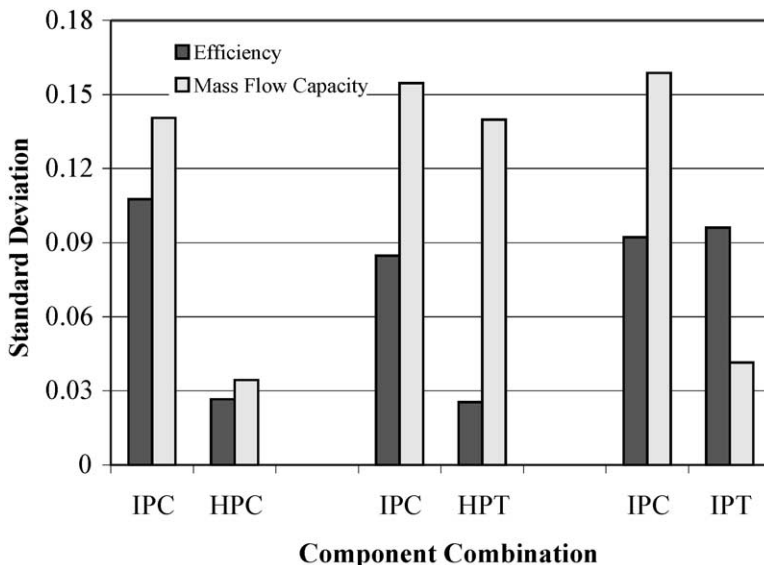


Fig. 5. Double-component network performance summary—standard deviation (absolute error); 1000 epochs/20-20-4/DCF approximation/SCG.

The proposed magnitudes of the engine deteriorations have already been mentioned. However, during the process of assembling the 8668 combinations of efficiency and mass flow capacity for both chosen components, the planned combined magnitudes of the deviations were not included. Table 6 gives the planned magnitudes and the corresponding maximum values. It would have been desirable to include the planned values, however, the actual values used are equally as valid. For instance, it is just as likely that one component will suffer more degradations than its partner, in the chosen pairs, as it would be that both should suffer the same degree of damage.

Table 6
Planned and actual double-component independent parameter deviations

Component pair	Deviation combination description	Component 1 deviations		Component 2 deviations	
		$\%(\Delta\eta)$	$\%(\Delta\Gamma)$	$\%(\Delta\eta)$	$\%(\Delta\Gamma)$
IPC + HPC	Planned	−5	−15	−3.0	−9
	Actual 1	−5	−15	−0.5	−1
	Actual 2	−0.5	−15	−3.0	−9
IPC + HPT	Planned	−5	−15	−5.0	+10
	Actual 1	−5	−15	−0.5	+1
	Actual 2	−0.5	−15	−5.0	+10
IPC + IPT	Planned	−5	−15	−2.5	+5
	Actual 1	−5	−15	−0.5	+1
	Actual 2	−4.5	−1	−2.5	+5

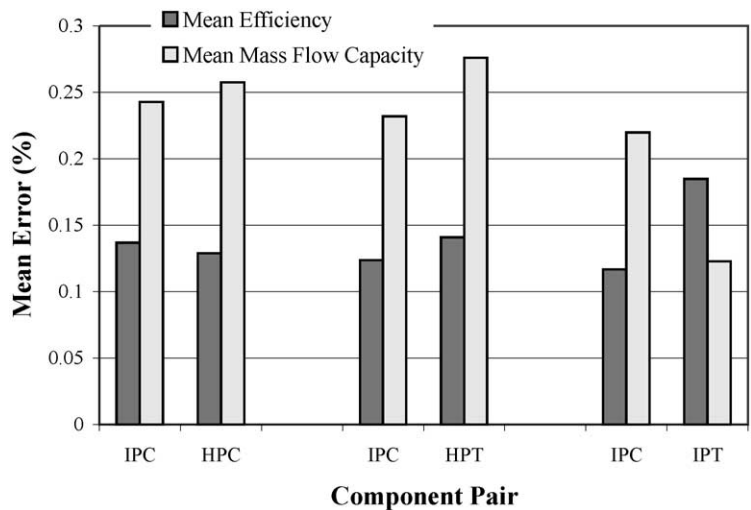


Fig. 6. Double-component network performance summary—mean error; 1000 epochs/20-20-4/DCF approximation/SCG.

It is worth noting again that the ratio of deterioration for each of the component's independent parameters is equally important to the relative magnitudes. The ratio of efficiency to mass flow capacity for component 1 of all the pairs in the 'Actual 1' case remains as 1:3, which represents compressor fouling [6]. The same ratio for component 2 of the IPC + HPT and IPC + IPT pairs in the 'Actual 1' case is 1:2, which is the same ratio as the planned value. A ratio of 1:2 for a turbine represents erosion [6]. Finally, the only discrepancy is that for component 2 of the IPC + HPC pair, the ratio is 1:2 rather than the planned 1:3.

For the 'Actual 2' case that refers to the correct maximum deviations for component 2 for all pairs, unfortunately, all the deviations for component 1 for all pairs were not as planned. Although, as has already been discussed, there are many combinations of efficiency and mass-flow capacity, the ratios for the component 1, 'Actual 2' case for all pairs, do not represent any particular engine degradation regime such as fouling or erosion.

As a footnote to these observations, it should be noted that the two 'actual' combinations quoted are only 2 of the possible 8668 combinations. However, they do represent the two combinations that include the maximum deteriorations of either component 1 or component 2.

The aim of an approximation ANN, or fault approximation ANN, is for it to be able to approximate an output based on a set of received data. Furthermore, the output produced by the ANN occurs after it has been trained with a set of pertinent data; typical errors introduced during training are shown in Fig. 7. It was therefore useful to assess how well the test target and the actual output were correlated. Initially, the challenge of assessing the correlation of 8668 data sets was considered. It was decided to choose 200 data sets at each of the beginning, middle and end of the 8668 range: the 200 data set choice and that of the 3 samples were both arbitrary

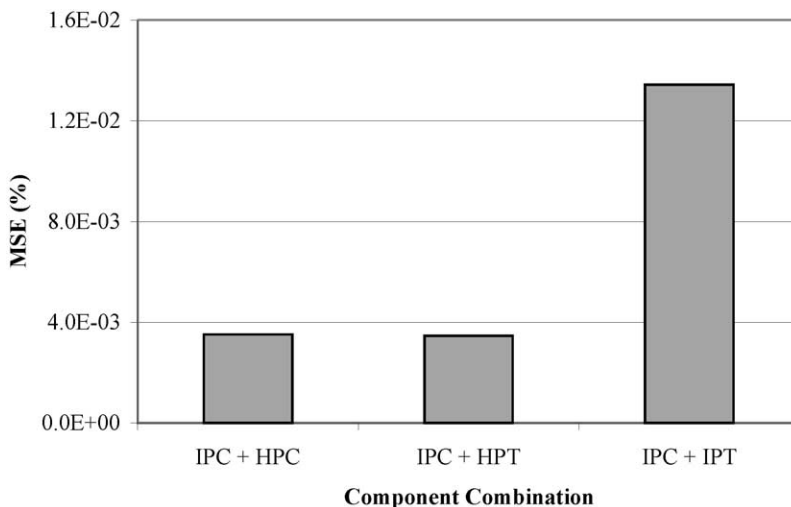


Fig. 7. Double-component network performance summary—mean square error.

decisions. For example, the correlations for the IPC + HPC combinations for the data sets 1→200 and 8468→8668 are shown in Figs. 8–11. It should be noted that a network, described as 11-20-20-4, implies a structure with 11 input measurements, 20 neurons in each hidden layer, and four output possibilities. Because the number of input measurements is fixed, sometimes it may not be included in the network definition.

Overall the results show a reasonably good correlation between ‘test target’ and ‘test actual’ data. For the efficiency plots, there is a consistently good correlation with only some scatter for the IPC. The mass-flow capacity correlates well with the target apart from some scatter for the IPC plots for the first 200 data sets.

Having completed a correlation assessment using the above technique, another alternative method was identified. This second method utilised a mathematical function called the coefficient of correlation and a summary for the component pairs is shown in Fig. 12. The second method allowed a single number to be quoted as a measure of performance. For instance, the coefficient of correlation for the IPC + HPC pairing IPC efficiency was approximately 99.98%. The worst performer was the IPT efficiency for the IPC + IPT component pair.

The data used to train and test the 3 individual ANNs were used for an ANN with 3 outputs. The purpose of this was to have a DCF network that could identify the faulty-component pair. The training and testing was again straightforward and

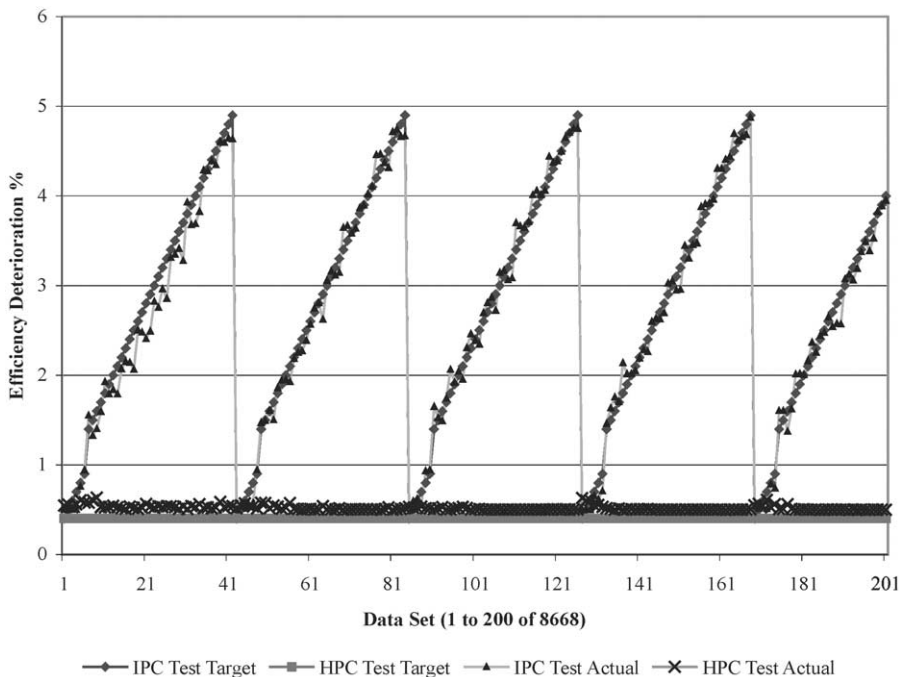


Fig. 8. Network test performance—IPC + HPC (data sets 1–200); 1276 epochs/20-20-4/IPC + HPC/SCG.

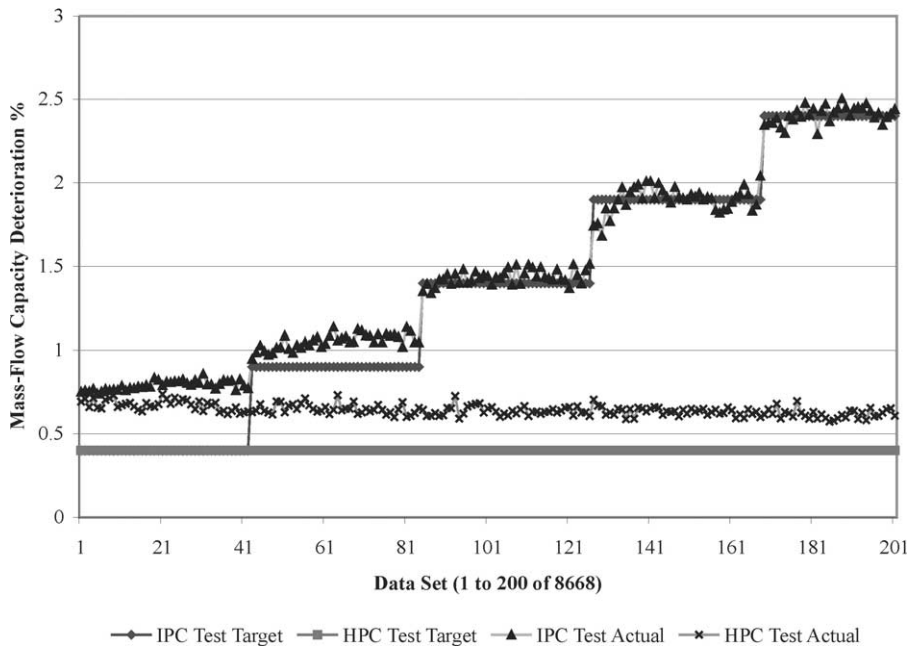


Fig. 9. Network test performance—IPC + HPC (data sets 1–200); 1276 epochs/20-20-4/IPC + HPC/SCG.

the results encouraging, since, as for the SCF diagnostic network, the mean errors were negligible.

Figs. 13 and 14 illustrate the frequencies of occurrence of the actual range of test errors. The IPC efficiency plot showed that the mean percentage test error was just under 0.13. Deductions from the IPC mass-flow capacity plot were far less conclusive, with a large spread percentage test-error of between just over zero up to 0.15.

6. Discussion

The results obtained for the double-component faults highlighted some general observations concerning the feasibility of networks for diagnostics. Regardless of which components were paired, each engine component had an individual network performance. For instance, the IPC was in each of the pairs, but had an almost constant standard deviation, mean error and coefficient of correlation regardless of the chosen partner. The absolute values for the previously mentioned parameters were valid only for the deteriorated data-set generated. It was not, however, possible to verify that this constant performance held true for all the components, since not all the pair combinations were investigated.

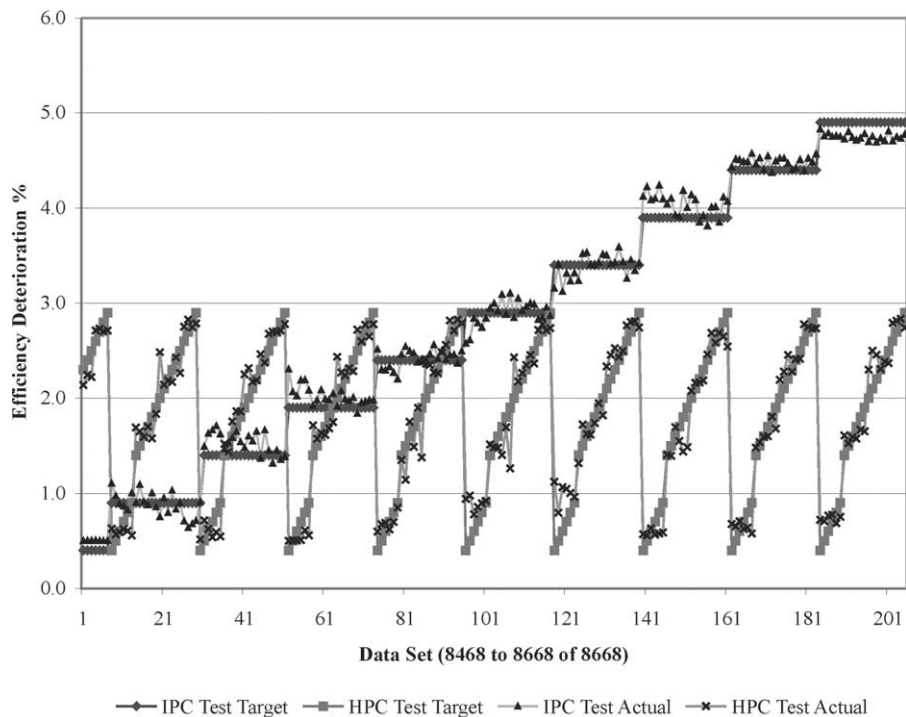


Fig. 10. Network test performance—IPC + HPC (data sets 8468–8668); 1276 epochs/20-20-4/IPC + HPC/SCG.

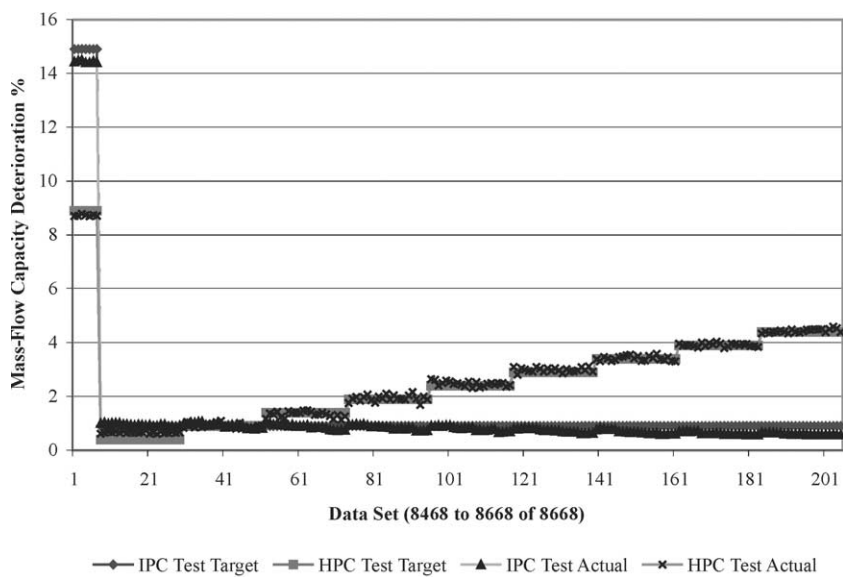


Fig. 11. Network test performance—IPC + HPC (data sets 8468–8668); 1276 epochs/20-20-4/IPC + HPC/SCG.

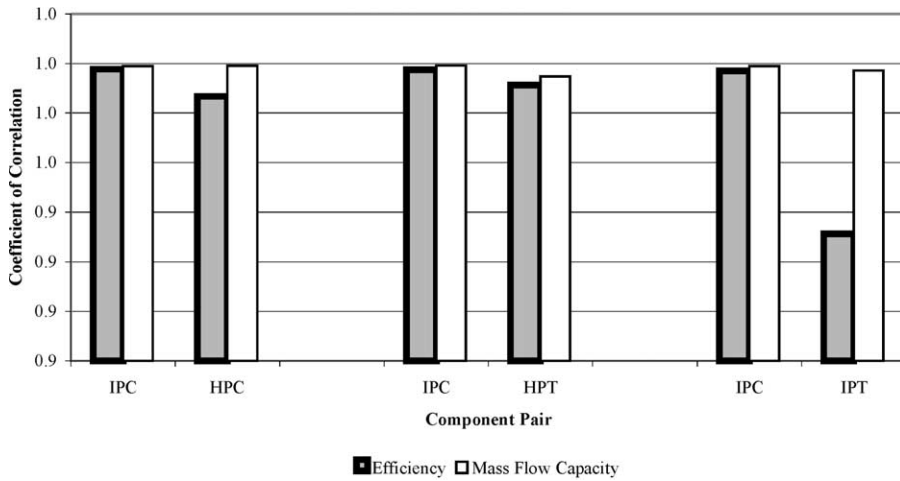


Fig. 12. Coefficient of correlation for DCF approximation—1000 epochs/20-20-4/DCF/SCG.

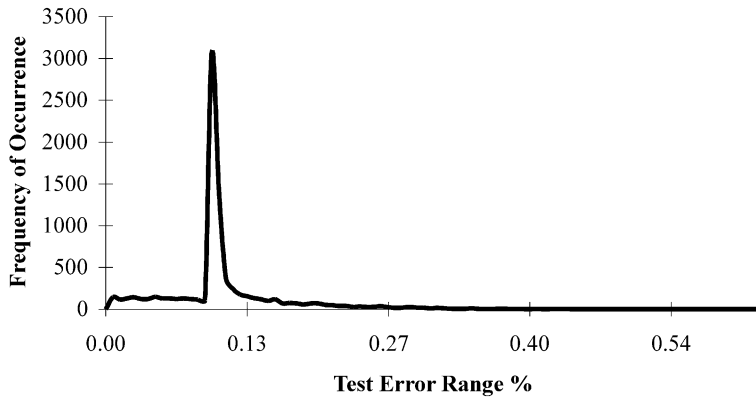


Fig. 13. Test error range for IPC efficiency; 1276 epochs/20-20-4/IPC + HPC approx/SCG.

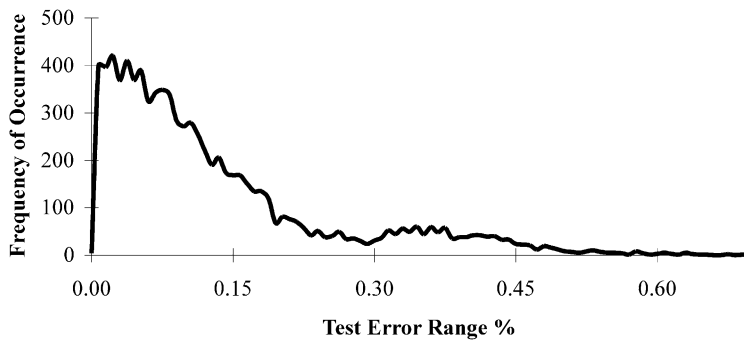


Fig. 14. Test error range for IPC flow capacity—1276 epochs/20-20-4/IPC + HPC, approx/SCG.

The actual deteriorated data generated, i.e. 8668 sets for the double-components, incorporated a large degree of randomness. Close inspection of the efficiencies and mass-flow capacities chosen revealed that, although there were logical trends, the actual values were random. The assessment of the network performance, therefore, was conducted with the assumption of random deterioration. Such an assumption would model realistically the effects of real-life engine deteriorations, but it was noted that a full network performance assessment should also include an entirely non-randomly generated data-set.

The optimal network structure used was 2 hidden layers of 20 neurons and an output layer of 4 neurons, i.e. the 20–20–4 structure. The network structure was only one of several criteria that needed to be considered. It would have been less objective to assess the operation of the networks by quoting only one of the criteria, namely: the structure details; MSE, mean error, standard deviation for the test or coefficient of correlation.

From a practical point-of-view, the above statements clarified the notion that the use of ANNs has an arbitrary aspect to them. It was clear that much more investigation would be needed before a realistic view of the feasibility of ANNs for the present application could be offered.

The data in Table 7 summarise the errors produced for a selection of engine deterioration combinations. For all of the approximation cases, the absolute errors were identified. Those highlighted represent the worst two for each case, i.e. single- and double-component faults. In particular, the peak errors for the SCF networks were about double the peak errors for the DCF networks. The results showed that for the network design chosen and the constraints applied, the errors were high. For instance an absolute error of 1.56 for the IPC represents a 12.5% variation on the target value.

It would, however, be prudent to conduct an investigation into the relationship between target data selection and resultant errors. For instance, altering the training

Table 7
Results for single and double-component fault/approximation networks

Component(s)	Implanted fault (%)				Predicted fault (%)				Absolute estimated error			
	Component 1		Component 2		Component 1		Component 2		Component 1		Component 2	
	η	Γ	η	Γ	η	Γ	η	Γ	η	Γ	η	Γ
Fan	–5	–12.5	–	–	–4.98	–12.37	–	–	0.02	0.13	–	–
IPC	–5	–12.5	–	–	–4.99	–14.06	–	–	0.10	1.56	–	–
HPC	–5	–12.5	–	–	–4.11	–12.16	–	–	0.89	0.34	–	–
HPT	–5	+12.5	–	–	–4.99	+11.42	–	–	0.01	1.08	–	–
IPT	–5	+12.5	–	–	–4.94	+12.16	–	–	0.06	0.34	–	–
LPT	–5	+12.5	–	–	–4.99	+12.06	–	–	0.01	0.44	–	–
IPC+HPC	–5	–15	–0.5	–1	–4.65	–14.48	–0.5	–0.88	0.35	0.52	0	0.12
IPC+HPT	–5	–15	–0.5	+1	–4.81	–14.61	–0.5	+0.74	0.19	0.39	0	0.26
IPC+IPT	–5	–15	–0.5	+1	–4.83	–14.59	–0.49	+0.86	0.17	0.41	0.01	0.14

data by a small arbitrary amount generated the target data, but it might be possible to influence the test performance by changing the test-data generation procedure.

Reference to [Table 7](#) would suggest that the performance of the DCF approximation networks was far better than for the SCF approximation networks. However, on balance, the results for the SCFs are better, which, as discussed already, was not expected.

The coefficient of correlation was used as one of the methods for assessing ANN performance. This means of assessment was just as useful for the component pairs as it was for the single components. In addition, just as for the single components, it was used most effectively in conjunction with other means of assessment like mean error and standard deviation.

The performance of an approximation ANN can be reduced by as much as 3% due to the loss, or degradation, of a sensor [4]. All the results obtained were not subject to any kind of sensor fault or degradation. Given that the data sets used included 11 dependent parameters, the probability of either sensor failure or degradation would in reality be fairly high. It would be reasonable to suggest that the probability of sensor problems would be a direct function of the number of sensors. The results lacked a degree of credibility that could have been provided by considering sensor faults. Future studies should therefore include this aspect of ANN assessment.

7. Conclusions

From the double-component fault approximation investigation, it can be concluded that:

1. The average standard deviation was similar, if not slightly better, than for the single-component faults; in reality the ANN error would rise with an increase in the number of engine components considered.
2. Generally the ANN performance for the double engine-component faults was good and the ANN for the IPC + HPC pair performed marginally better than for the other 2 pairs.

References

- [1] Li IY. Performance-analysis-based gas-turbine diagnostics: a review. *Journal of Power and Energy*, Part A, IMechE 2002;216:363–77.
- [2] Friend R. A probabilistic, diagnostic and prognostic system for engine health and usage management. In: *Aerospac Conference Proceedings*, 2000 IEEE, vol. 6, 18–25 March 2000. p. 185–92.
- [3] Green AJ. The development of engine-health monitoring for gas-turbine engine health and life management. AIAA 98-3544. In: *34th AIAA/ASME/SAE/ASEE Joint Propulsion Conference & Exhibition*, Cleveland, Ohio, USA, 13–15 July 1998.
- [4] Alcock A. (Application of artificial neural networks for fault diagnosis of military turbofan-engines. (MSc Thesis) Cranfield University, UK, 2002.

- [5] Theriault PG. Application of artificial neural-networks to the fault diagnosis of a military turbofan-engine (MSc thesis). Cranfield University, UK, 2002.
- [6] Escher PC. Gas-turbine Engine and Sensor Fault Diagnosis. PhD thesis. Cranfield University, UK. 1995.
- [7] Powrie HEG, Fisher CE. *Engine-health monitoring: towards total prognostics*. Aerospace Conference Proceedings, March 1999 IEEE, vol. 3, 6–13 1999. p. 11–20.
- [8] Warwick T. *Overview of ARP 1587 aircraft gas-turbine engine-monitoring system guide*. SAE Aircraft Gas-turbine Engine Monitoring Systems SP-478, Aerospace Congress & Exposition, Los Angeles Convention Center, California, USA, 13–16 October 1980. 1981.
- [9] Smith L. *An introduction to neural networks*. <http://www.cs.stir.ac.uk/~lss/NNIntro/InvSlides.html>. University of Stirling; 2002.
- [10] Ogaji S, Li YG, Sampath S, Singh R. Gas-path fault diagnosis of a turbofan engine from transient data using artificial neural networks (GT2003-38423). ASME Turbo Expo, Atlanta, Georgia, USA, 16–19 June 2003.
- [11] Cruz, C. Understanding neural networks: a primer. Clutter Information Corps, USA. ISBN 0-943-779-693; 1991.
- [12] Mathworks. Matlab manual. 2003.
- [13] Winston PH. Artificial intelligence—3rd ed. Addison-Wesley Publishing Company. ISBN 0-201-53377-4; 1992.
- [14] Ogaji S, Singh R. Study of the optimisation of measurement sets for gas-path fault diagnosis in gas-turbines. ASME Turbo Expo, Amsterdam, The Netherlands, 3–6 June 2002.